

Step 1 (October)

Cutting: Strips are cut across the width of the fabric making them approximately 42" long with selvages on each of the short ends.


Fabric #1 - Cut ten 2 1/2" wide strips

Fabric #2 - Cut fourteen 2 1/2" wide strips


Fabric #3 - Cut two 6 1/2" wide strips. Cut these strips into thirty-two 2 1/2" x 6 1/2" rectangles.

Piecing: Use 1/4" seam allowances.


Use the strips of fabrics 1 and 2 to make panels like those shown below. Press all seam allowance toward fabric 2. Measure the panels after they are pressed. They should measure 6 1/2" wide at this time.

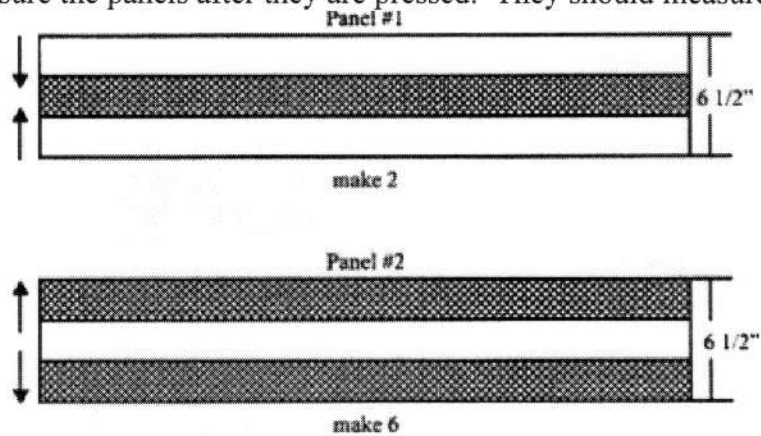

Crosscut all of the panels into sections that are 2 1/2" wide. Cut thirty-two (32) sections from the #1 panels and ninety-six (96) from the #2 panels.

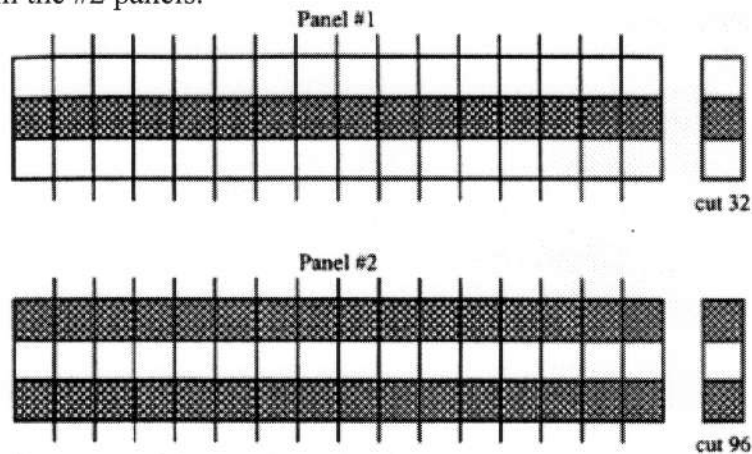

Sew a rectangle of fabric 3 to thirty-two of the sections that were cut from #2 panels. Press the seam allowances toward fabric 3. Make 32



Use the remaining crosscut sections to make thirty-two nine patch blocks. Press seam allowances away from the center row. Make 32

